


PRODUCT FEATURES SUMMARY

Product name: MOD170
Availability for customer 2003 Q2

For information only - May change without notice

GENERAL CHARACTERISTICS	
Dimensions (in mm) :	60 x 40 x 10
Weight (in g) :	35
Volume (cm3)	24
ETSI GSM phase 2 type Approved	Yes
FTA approved	Yes
Full Shielded and ready-to-use	Yes
MMCX antenna connector	Yes
60-pin connector including RS232 serial lin	Yes
Internal 3V SIM card reader	Yes
Remote control by AT commands	Yes
RADIO CAPACITY/ DATA TRANSMISSION	
GSM 900	Yes
DSC 1800	Yes
PCS 1900	Yes
GPRS with PBCCH	Class 8 (up to 56Kbps)
CSD	9.6 Kbps
Data/SMS/Fax	Yes

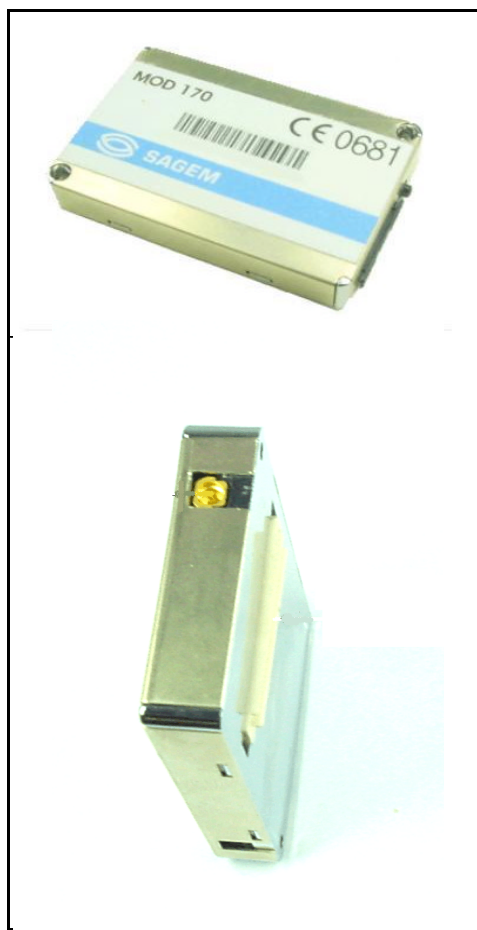

ELECTRICAL/PHYSICAL	
Power supply	5VDC +/- 5%
Standby mode	2.5mA (typ)
Transmit power	Class 4 (2W) for GSM / Class 1 (1W) for DCS & PCS
Casing	Complete shielding
Mounting	2 screw holes
Operating temperature range	-20°C to 55°C
Storage temperature range	-40°C to 85°C
Full RS232	Yes
Full AT commands	Yes

SHORT MESSAGE SERVICES	
Line identification	Yes
Call waiting	Yes
Call hold	Yes
Call forwarding	Yes
Multiparty	Yes
Closed user group	Yes
Call barring	Yes
Advise of Charge	Yes
USSD	Yes

Documentation	
Module booklet	Yes
List of supported AT command	Yes
Technical specifications	Yes
User guide	Yes

Non contractual photography