



Specification

SPECIFICATION

- Part No. : **AP-10D-01**
- Product Name : 10mm SMT 25dB Active GPS Patch Antenna
- Features : Unique SMT GPS active patch
High performance 25dB LNA
Ultra low power consumption
RoHS compliant
- Photo :



REVISION STATUS

Version	Date	Page	Revision Description	Prepared	Approved
01	Apr 9 th 2008	All	New product	TW Product Centre	Zita Lin



Specification

1.0 Introduction

The AP-10D-01 active GPS patch antenna is the smallest SMT GPS high performance embedded antenna currently available in the world. Using extremely sensitive high dielectric constant powder formulation and tight process control the 10mm x 10mm x 4mm patch antenna is accurately tuned to have its frequency band right at 1575.42MHz for GPS systems. A patented SMT structure gives high reliability in integration. With a low power consumption two stage LNA , this small active patch has the performance of an ordinary active patch, but at only a quarter of the size. This product is suited to small form factor mobile devices such as GPS Smartphones, Personal Location, Medical devices, Telematic devices and Automotive navigation and tracking. Custom gain, connector and cable versions are available.

2.0 Specification

Antenna

Frequency	1575.42 ± 1.023MHz
Gain	Typ -3dBic @ Zenith
Impedance	50 Ω
Polarization	RHCP
Axial Ratio	Max 4.0dB @ Zenith
Dimension	10mm x 10mm x 4mm (add 7.3mm depth for vertical PCB)

LNA

Frequency	1575.42 ± 1.023MHz
Gain	Min. 13dB, Typ. 15dB @ 25°C ± 5°C
Noise Figure	Typ. 1.4dB @ 25°C ± 5°C Max 1.8dB @ 85°C
Output Impedance	50 Ω
Output VSWR	Max. 2.0

Connection

Connection	SMT via solder pads
------------	---------------------



Specification


Total Specification

Frequency	1575.42 ± 1.023MHz
Gain	22 ± 4dBic @ 90°
Output Impedance	50 Ω
Polarization	RHCP
Output VSWR	Max 2.0
Operation Temperature	-20°C to + 65°C
Storage Temperature	-30°C to + 75°C
Relative Humidity	40% to 95%
Input Voltage	Min. 2.7V, Typ. 3.0V, Max. 3.3V
Current	Typ. 10mA, Max. 13mA



Specification

3.0 Technical Drawing

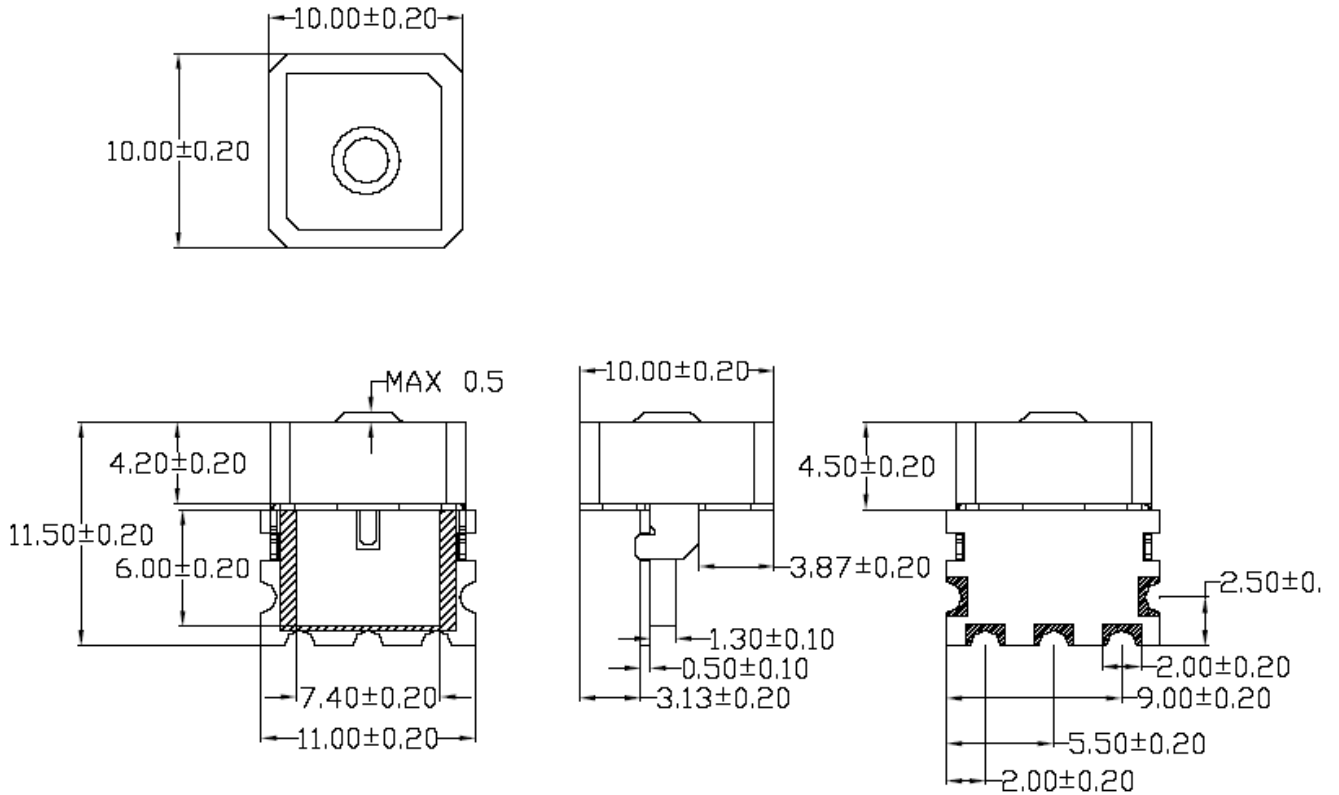

Unit:mm