



GA107
Magnetic Telematic GSM Antenna
 (900 / 1800 / 1900 / 2200MHz)



Features

- Quad -band cellular (GSM / PCS / DCS / UMTS / WCDMA)
- Constant reception and transmission – due to omni directional gain across all bands
- Optional cables and connectors (RG-174, SMA(M), FME(M), FME(F), MCX(M), etc.)
- ROHS Compliant
- Magnetic mount

Specifications				
ELECTRICAL				
	GSM	DCS	PCS	UMTS
Band	880-960	1710-1880	1850-1990	1710- 2170
Average Gain	3dBi			
Polarization	Vertical			
Impedance	50 ohms			
Input Connection	Coaxial Cable - RG174 Standard, Fully customizable			
VSWR (Min performance)	<2.0:1			
Radiation pattern	Omni directional			
MECHANICAL				
Whip	97mm			
Weight	60g			
Material	300 series stainless steel with black Duracoat finish			


Authorised Distributor: Alpha Micro Components Ltd | Tel: +44 1256 851770 | e: sales@alphamicro.net | www.alphamicro.net

taoglas

the antenna solutions provider



Return loss

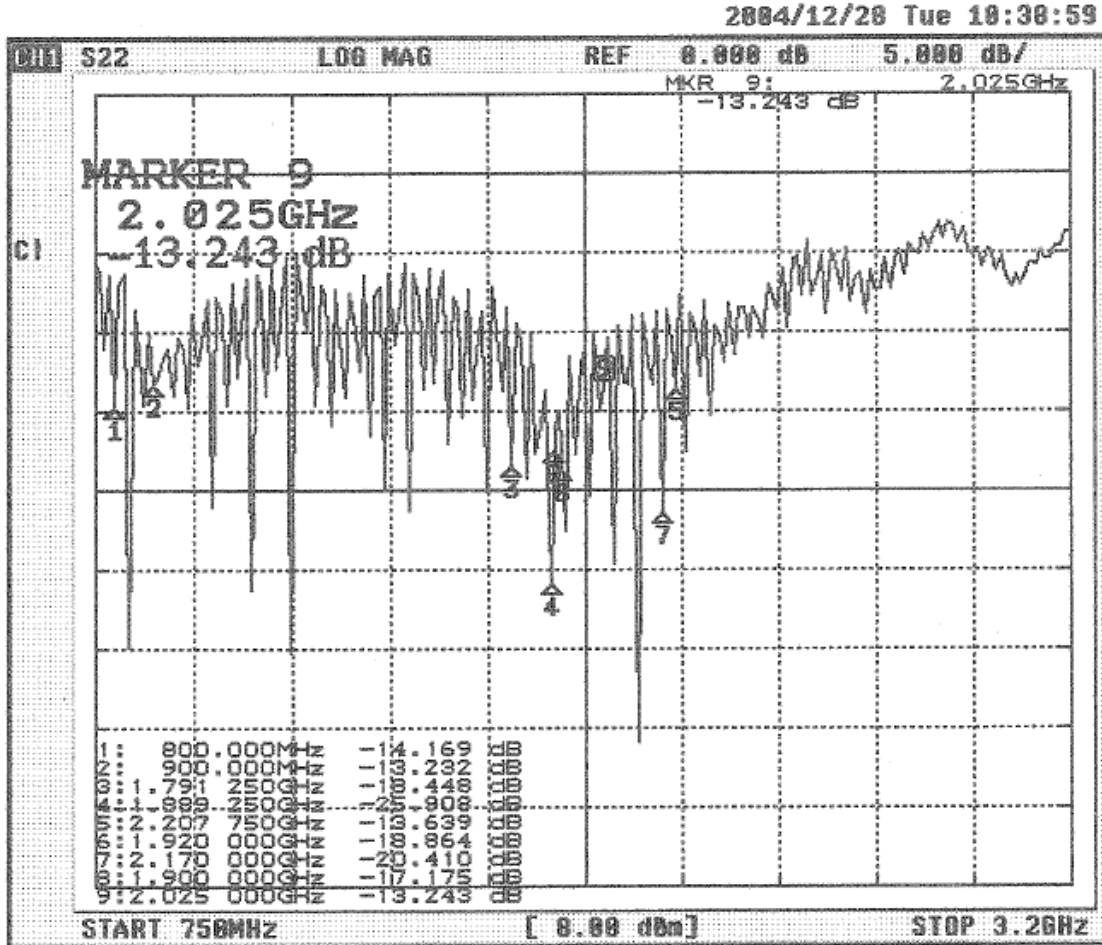

Authorised Distributor: Alpha Micro Components Ltd | Tel: +44 1256 851770 | e: sales@alphamicro.net | www.alphamicro.net

©Copyright 2006 by Taoglas Limited. All Rights Reserved.
Unit 3, Enniscorthy Technology Centre, Mile House Road,
Enniscorthy, Co. Wexford, Ireland.
www.taoglas.com