



GW-11

2.4 GHz Band SMA Mount Dipole

1.8 dBi

The GW-11 2.4 GHz dipole reverse SMA plug mount antenna is ideal for 2.4 GHz wireless applications such as Wireless LAN or Zigbee applications. At only 82mm in length with omni-directional 1.8dBi gain across all bands the GW11 ensures reliable reception and transmission. The antenna structure is designed for robust handling and the housing is made with TPE, giving superior environmental reliability and a quality finish. The antenna can be rotated 90 degrees on the base hinge for ease of placement. Connector mount is fully customizable.

Features

Electrical

- | | |
|------------------|---|
| • 2.4 GHz Band | Suitable for Wireless LAN, Bluetooth, etc |
| • Gain | 1.8 dBi |
| • VSWR | 1.92 Max |
| • Directivity | Omni-directional |
| • Power Handling | 1W |

Mechanical


- | | |
|----------------|---------------------------|
| • Miniaturized | 82mm |
| • TPE Housing | Robust and Quality Feel |
| • Connector | Straight SMA Plug Reverse |
| • Hinge | 90 degrees rotation |

Other

- Black Color
- ROHS Compliant



Outline Drawing

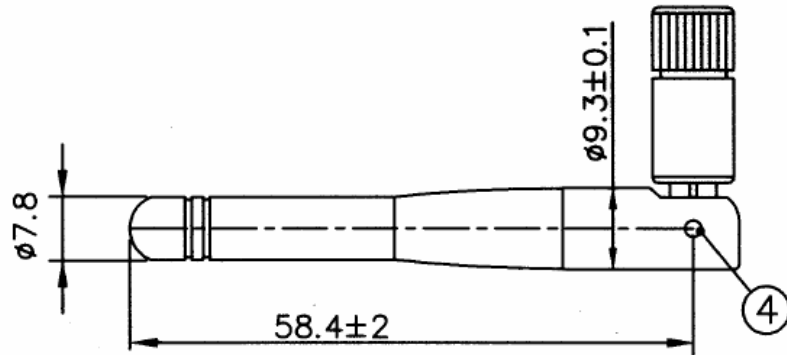

Unit:mm

Fig. 1 Side View

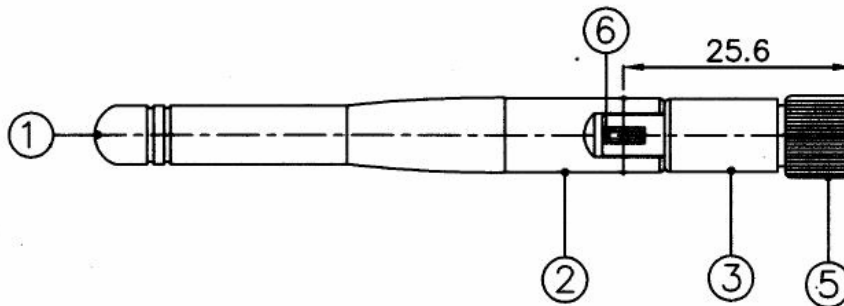



Fig. 2 Side View Structure

Key

1	Antenna Cover	TPE (Black)
2	Antenna Base	PC (Black)
3	Antenna Base	PBT (Black)
4	Rivet	Brass, Zn Plated (Black)
5	Connector	SMA Straight Plug Reverse (Black)
6	Cable	RG-178 50 Ohm




Smith Chart, VSWR, S11 Magnitude

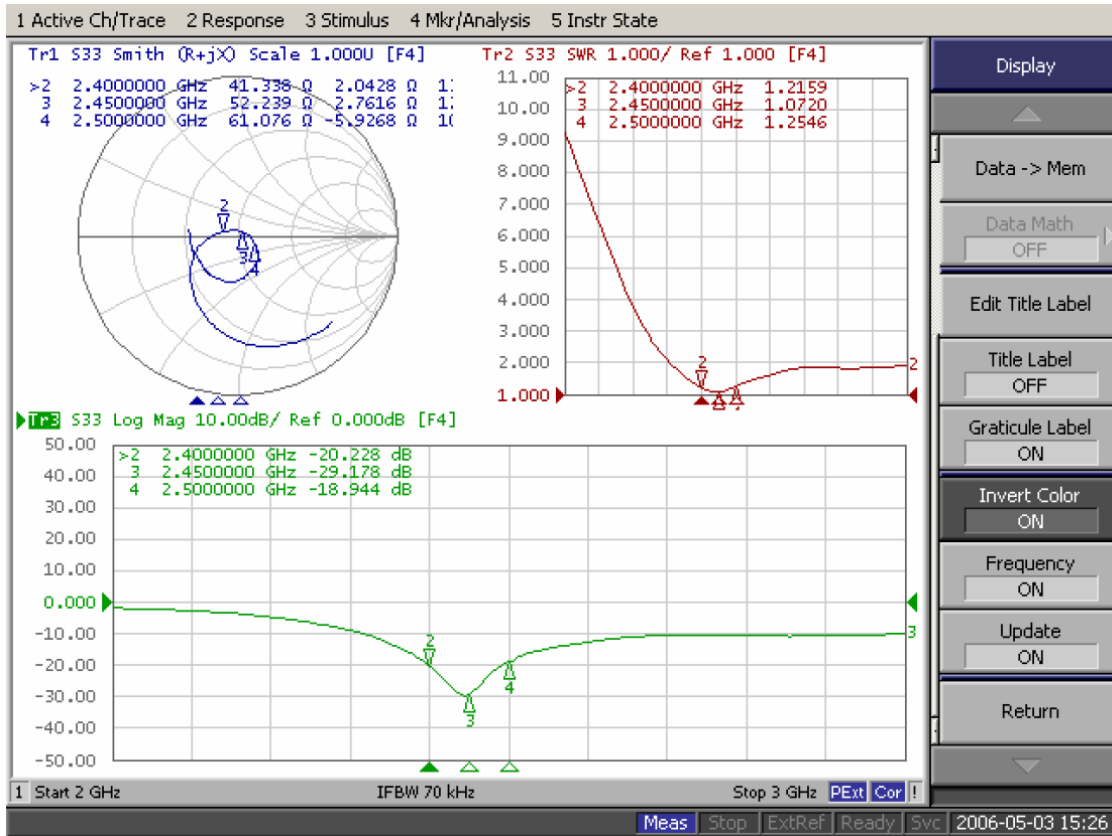




2D Far Field Radiation Pattern - Horizontal

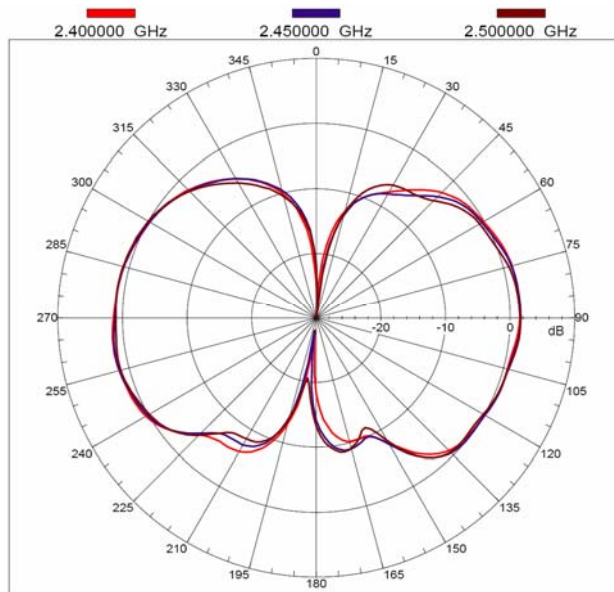

2D Far Field Radiation Pattern - Vertical

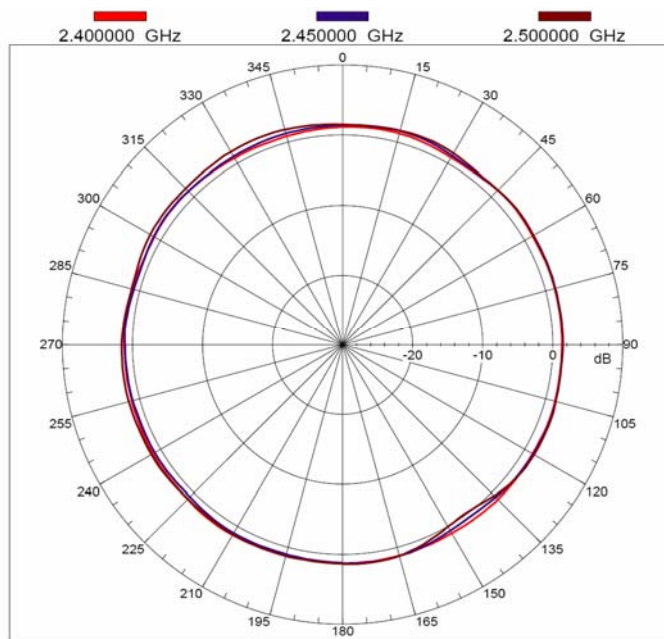

Authorised Distributor: Alpha Micro Components Ltd | Tel: +44 1256 851770 | e: sales@alphamicro.net | www.alphamicro.net

©Copyright 2006 by Taoglas Limited. All Rights Reserved.
Unit 3, Enniscorthy Technology Centre, Mile House Road,
Enniscorthy, Co. Wexford, Ireland.
www.taoglas.com